

Masoneilan® 21000 Series Control Valves

Specification Data

CH21000

01/07

**Complete Line of
Rugged, Top Guided,
Globe Valves with
Lo-dB®/Anti-Cavitation
Capabilities**



 DRESSER®

Table of Contents

Features	2
Numbering System	3
General Data	3
Temperature Range/Seat Leakage.....	4
Ratings/Connections.....	4
C_v and F_L versus Travel	5
Materials of Construction	
Standard - Carbon Steel, Stainless Steel	11
Optional Configurations and Materials	13
Bellows Seal.....	14
NACE Construction	17
Dimensions	18
Weights	22
Accessories and Options	23
Sales Offices and Distribution Centers	Back Cover

Features

21000 Series single ported unbalanced trim, heavy top guided control valves are designed with built in versatility making them well-suited to handle a wide variety of process applications. Standard features include:

Top Guided

Rugged, heavy top plug guiding provides maximum support to ensure plug stability.

Single and Double Stage

Lo-dB®/Anti-cavitation Trim

Replacing the conventional plug with the Lo-dB®/Anti-cavitation design provides excellent noise attenuation or cavitation control.

Reduced Capacity and Low Flow Trim

A series of reduced area trim is available to provide wide flow range capabilities in all valve sizes. Optional trim to meet low flow requirements is also available.

High Pressure Capability

A variety of actuators are available to handle low to high pressure drop requirements. Allowable pressure drops for specific leakage classes are available in Masoneilan document PH1080, or can be calculated using the Masoneilan Sizing and Selection Program.

Tight Shutoff

Class IV leakage is standard. Optional constructions meet IEC 534-4 and ANSI/FCI 70.2 Class V and VI.

Hardened Trim

Provided as standard to handle high pressure drop applications.

Trim Type

Standard construction offers either a quick change or threaded seat ring. This trim is unbalanced and uses no seals or pilots.

Environmental Packing

Low emission LE® Packing is available to assure compliance with latest environmental regulations.

Emissions Free


Bellows seal design option is available to meet zero emissions requirements.

NACE Compliance

The 21000 Series is available for Sour Service Applications using design and construction methods in accordance with NACE Standard MR 0103. Applications requiring compliance to MR 0175, 2003 Rev or ISO 15156 require engineering review.

Trade names noted throughout are for reference only. Masoneilan reserves the right to supply trade named material or its equivalent.

Numbering System

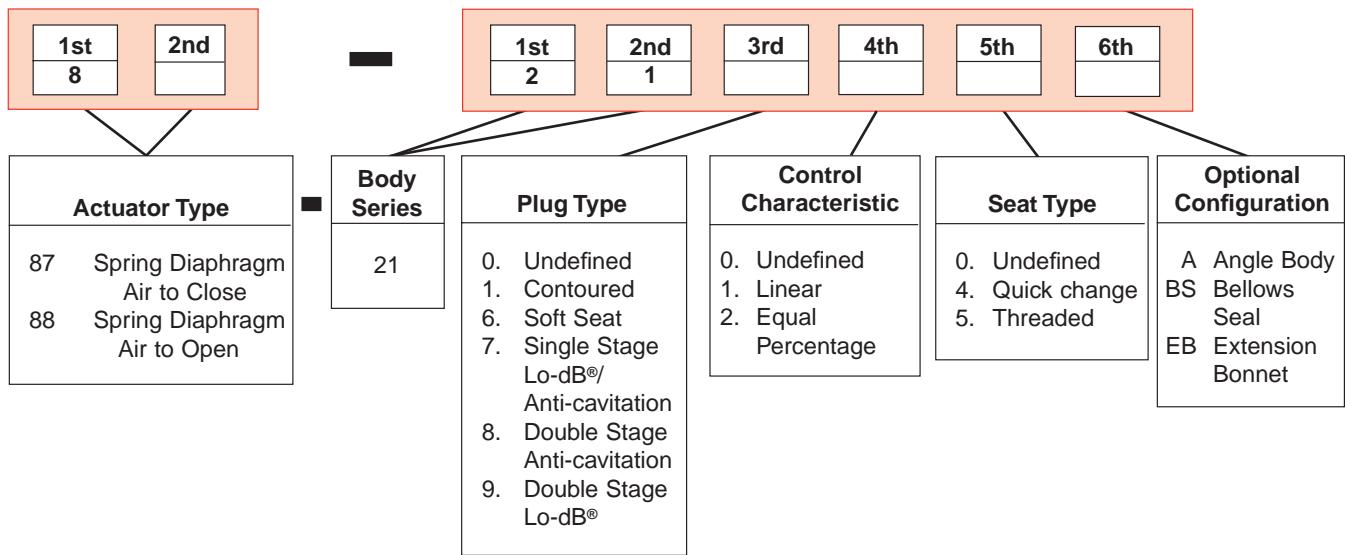

General Data

- Flow Direction**
 - contoured: flow-to-open
 - Lo-dB®: flow-to-open
 - anti-cavitation: flow-to-close
- Body**
 - type: high capacity globe
high capacity angle
- Bonnet**
 - type: bolted standard
bolted extension
- Body and Bonnet**
 - materials: carbon steel
316 stainless steel
chrome-molybdenum steel
others
- Trim**
 - plug type: contoured
soft seat
Lo-dB® (1 or 2 stages)
anti-cavitation (1 or 2 stages)
 - seat ring: threaded
quick change
 - guide: heavy top guided
 - capacity: full area
reduced capacity in all sizes
 - C_V ratio: 50:1
 - flow characteristic: linear
equal percentage
- Actuator**
 - type: spring diaphragm
handwheel: optional

Temperature Range/Seat Leakage

Contoured Trim

Valve Size		Body ⁽¹⁾ Rating	Seat Type	Packing Material	Temperature Range ⁽²⁾				Seat Leakage, IEC 534-4 and ANSI/FCI 70.2 Class
					Standard Bonnet		Extension Bonnet		
inch	mm				min.	max.	min.	max.	
.75 to 6	20 to 150	ANSI Class 150 to 2500 and equivalent PN	Metal	PTFE or LE [®] Packing ⁽⁵⁾	-20°F (-29°C)	+450°F (+232°C)	-20°F (-29°C)	+800°F (+427°C)	IV
				Flexible Graphite	-20°F (-29°C)	+800°F (+427°C)	-20°F (-29°C)	+800°F (+427°C)	
			Soft Seat	Any	-20°F (-29°C)	+450°F (+232°C)	-20°F (-29°C)	+450°F (+232°C)	VI

Lo-dB[®]/Anti-Cavitation Trim (1 or 2 Stage Design)⁽³⁾

Valve ⁽⁴⁾ Size		Body ⁽¹⁾ Rating	Seat Type	Packing Material	Temperature Range ⁽²⁾				Seat Leakage, IEC 534-4 and ANSI/FCI 70.2 Class
					Standard Bonnet		Extension Bonnet		
inch	mm				min.	max.	min.	max.	
.75 to 6	20 to 150	ANSI Class 150 to 2500 and equivalent PN	Metal	PTFE or LE [®] Packing ⁽⁵⁾	-20°F (-29°C)	+450°F (+232°C)	-20°F (-29°C)	+800°F (+427°C)	IV
				Flexible Graphite	-20°F (-29°C)	+800°F (+427°C)	-20°F (-29°C)	+800°F (+427°C)	
			Soft Seat	Any	-20°F (-29°C)	+450°F (+232°C)	-20°F (-29°C)	+450°F (+232°C)	VI

1. ANSI Class 900 to 2500 available only in .75 to 2 inch (20 to 50 mm) sizes.

2. See Materials of Construction Tables for other temperature limitations.

3. 2-Stage design only available with Quick Change seat rings.

4. 2-Stage Anti-Cavitation Trim not available in 6 inch (150 mm) size.

5. LE Packing for low emissions applications is limited to maximum pressure and temperature as shown in the chart on page 14.

Ratings/Connections⁽¹⁾

RF Flanged

Socket Weld

Threaded

RT Joint

Butt Weld

Valve ⁽²⁾ Size		ANSI Class 150 to 600 ⁽³⁾ and equivalent PN				ANSI Class 900 to 2500 ⁽³⁾ and equivalent PN			
inch	mm					<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="triangle"/>
.75 to 2	20 to 50	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="triangle"/>	<input checked="" type="checkbox"/>	<input type="radio"/>	<input type="triangle"/>	<input checked="" type="checkbox"/>
3 to 6	80 to 150	<input type="checkbox"/>		<input type="triangle"/>	<input checked="" type="checkbox"/>	See 41005 Series			

1. Standard flange finish of Ra 125-250. Other flange facings and surface finishes available.

2. Sizes, ratings and end connections available in both globe and angle body styles.

3. Butt weld end connections available only in 2 inch (50 mm) size.

C_V and F_L versus Travel for 21100 and 21600 Series

Contoured Trim

Body Rating: ANSI Class 150 to 600

Sizes: DN 20 to DN 150 - .75" through 6"

Direction: FLOW-TO-OPEN (FTO)

Flow Characteristic: LINEAR

Percent of Travel				10	20	30	40	50	60	70	80	90	100						
F _L				0.93	0.93	0.92	0.92	0.91	0.91	0.91	0.90	0.90	0.90						
Valve Size		Orifice Diameter		Travel		Rated C _V													
inches	mm	inches	mm	inches	mm	0.01	0.02	0.03	0.04	0.04	0.05	0.06	0.08	0.09	0.1				
.75 & 1	20 & 25	0.125	3.2	0.8	20.3	0.02	0.04	0.06	0.07	0.09	0.11	0.13	0.15	0.18	0.2				
						0.03	0.06	0.08	0.11	0.13	0.16	0.19	0.23	0.27	0.3				
		0.250	6.4			0.04	0.08	0.11	0.14	0.18	0.22	0.26	0.30	0.36	0.4				
						0.06	0.12	0.17	0.22	0.27	0.32	0.38	0.45	0.54	0.6				
						0.08	0.16	0.22	0.29	0.36	0.43	0.51	0.60	0.72	0.8				
						0.10	0.20	0.28	0.36	0.45	0.54	0.64	0.76	0.90	1				
						0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7				
						0.375	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8				
						0.500	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6				
						0.812	20.6	0.8	20.3	1.1	2.2	3.2	4.3	5.4	6.7	7.9	9.2	11	12
1.5	40	0.250	6.4	0.8	20.3	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.11				
						0.03	0.06	0.08	0.11	0.13	0.16	0.19	0.23	0.27	0.3				
						0.06	0.12	0.17	0.22	0.27	0.32	0.38	0.45	0.54	0.6				
						0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7				
		0.375	9.5	0.8	20.3	0.34	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8				
						0.500	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6				
						0.812	20.6	0.8	20.3	1.2	2.3	3.5	4.6	5.9	7.2	8.6	10	11	13
						1.250	31.8	0.8	20.3	2.3	4.5	6.8	8.9	11	14	17	19	22	25
						1.625	41.3	0.8	20.3	3.2	6.3	9.5	12	16	19	23	27	31	35
						0.250	6.4	0.8	20.3	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.11
2	50	0.250	6.4	0.8	20.3	0.03	0.06	0.08	0.11	0.13	0.16	0.19	0.23	0.27	0.3				
						0.06	0.12	0.17	0.22	0.27	0.32	0.38	0.45	0.54	0.6				
						0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7				
						0.375	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8				
		0.500	12.7	0.8	20.3	0.54	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6				
						0.812	20.6	0.8	20.3	1.4	2.7	4.1	5.3	6.8	8.3	9.9	12	13	15
						1.250	31.8	0.8	20.3	2.3	4.7	7.0	9.2	12	14	17	20	23	26
						1.625	41.3	0.8	20.3	4.1	8.3	12	16	21	26	30	35	40	46
						1.250	31.8	1.5	38.1	2.8	5.6	8.4	11	14	17	20	24	27	31
						1.625	41.3	1.5	38.1	4.2	8.5	13	17	21	26	31	36	41	47
4	100	2.625	66.7	1.5	38.1	9.9	20	30	39	50	61	73	85	97	110				
						3.500	88.9	1.5	38.1	18	35	53	69	88	108	129	150	172	195
						5.000	127.0	2.0	50.8	36	72	108	142	180	222	264	308	352	400

Standard Bellows Seal construction available for ANSI Class 150 - 300 and capacities of C_V = 1.7 and higher

 Quick Change Trim Only

 Note: Close Clearance Trim construction used for low flow capacities (C_V<1.7) in valve sizes .75 & 1 inches (20 & 25 mm).

C_V and F_L versus Travel for 21100 and 21600 Series

Contoured Trim

Body Rating: ANSI Class 150 to 600
Sizes: DN 20 to DN 150 - .75" to 6"

Direction: FLOW-TO-OPEN (FTO)
Flow Characteristic: EQUAL PERCENTAGE

Percent of Travel				10	20	30	40	50	60	70	80	90	100		
F _L				0.93	0.93	0.93	0.93	0.93	0.92	0.92	0.91	0.91	0.9		
Valve Size		Orifice Diameter		Travel		Rated C _V									
inches	mm	inches	mm	inches	mm										
.75 & 1.00	20 & 25	0.250	6.4	0.8	20.3	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.3	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.0	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.43	0.61	0.84	1.3	2.3	4.3	6.8	8.9	11	12
1.50	40	0.250	6.4	0.8	20.3	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.3	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.05	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.39	0.58	0.86	1.36	2.3	3.9	6.1	8.6	11	13
		1.250	31.8	0.8	20.3	0.90	1.28	1.76	2.8	4.7	9.0	14	19	22	25
		1.625	41.3	0.8	20.3	1.27	1.79	2.46	3.9	6.6	12.6	20	26	31	35
2	50	0.250	6.4	0.8	20.3	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.3	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.0	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.45	0.67	0.99	1.6	2.6	4.5	7.0	9.9	13	15
		1.250	31.8	0.8	20.3	0.77	1.2	1.7	2.7	4.5	7.7	12	17	23	26
		1.625	41.3	0.8	20.3	1.7	2.3	3.2	5.1	8.7	17	26	34	41	46
3	80	1.250	31.8	1.5	38.1	0.92	1.4	2.0	3.2	5.4	9.2	15	20	27	31
		1.625	41.3	1.5	38.1	1.4	2.1	3.1	4.9	8.2	14	22	31	41	47
		2.625	66.7	1.5	38.1	4.0	5.6	7.7	12	21	40	62	82	98	110
4	100	1.625	41.3	1.5	38.1	1.5	2.2	3.2	5.1	8.5	15	23	32	43	49
		2.625	66.7	1.5	38.1	3.4	5.0	7.5	12	20	34	53	75	99	113
		3.500	88.9	1.5	38.1	7.1	10.0	13.7	22	37	70	110	145	174	195
6	150	2.625	66.7	2.0	50.8	3.8	5.6	8.3	13	22	38	59	83	110	126
		3.500	88.9	2.0	50.8	6.2	9.3	14	22	36	62	97	137	181	208
		5.000	127.0	2.0	50.8	14	20	28	44	76	144	226	298	357	400

Quick Change Trim Only

21700 Series

Single Stage Lo-dB®/Anti-Cavitation Trim

Body Rating: ANSI Class 150 to 600
Sizes: DN 20 to DN 150 - .75" to 6"

Direction: FLOW-TO-OPEN (FTO)
& FLOW-TO-CLOSE (FTC)
Flow Characteristic: LINEAR

Percent of Travel				10	20	30	40	50	60	70	80	90	100		
F _L				0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	
Valve Size		Orifice Diameter		Travel		Rated C _V									
inches	mm	inches	mm	inches	mm										
.75 & 1	20 & 25	0.812	20.6	0.8	20.3	0.40	0.80	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4
						0.80	1.6	2.4	3.2	4.0	4.8	5.6	6.4	7.2	8
1.5	40	1.250	31.8	0.8	20.3	0.80	1.6	2.4	3.2	4.0	4.8	5.6	6.4	7.2	8
						1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15
		1.625	41.3	0.8	20.3	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15
2	50	1.250	31.8	0.8	20.3	0.80	1.6	2.4	3.2	4.0	4.8	5.6	6.4	7.2	8
						1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15
		1.625	41.3	0.8	20.3	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25
3	80	2.625	66.7	1.5	38.1	4.8	9.6	14.4	19.2	24.0	28.8	33.6	38.4	43.2	48
						7.5	15.0	22.5	30.0	37.5	45.0	52.5	60.0	67.5	75
4	100	2.625	66.7	1.5	38.1	6.3	12.6	18.9	25.2	31.5	37.8	44.1	50.4	56.7	63
		3.500	88.9	1.5	38.1	10	20	30	40	50	60	70	80	90	100
6	150	5.000	127.0	2.0	50.8	15	30	45	60	75	90	105	120	135	150
						20	40	60	80	100	120	140	160	180	200

C_V and F_L versus Travel for 21800 Series

Double Stage Anti-Cavitation Trim

Body Rating: ANSI Class 150 to 600

Sizes: DN 20 to DN 100 - .75" to 4"

Direction: FLOW-TO-CLOSE (FTC)

Flow Characteristic: LINEAR

Percent of Travel					10	20	30	40	50	60	70	80	90	100
F _L					0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975
Valve Size		Orifice Diameter		Travel	Rated C _V									
inches	mm	inches	mm	inches mm										
.75 & 1	20 & 25	0.812	20.6	0.8 20.3	0.23	0.46	0.7	0.9	1.2	1.4	1.6	1.8	2.1	2.3
					0.45	0.9	1.4	1.8	2.3	2.7	3.2	3.6	4.1	4.5
1.5	40	0.812	20.6	0.8 20.3	0.23	0.5	0.7	0.9	1.2	1.4	1.6	1.8	2.1	2.3
					0.45	0.9	1.4	1.8	2.3	2.7	3.2	3.6	4.1	4.5
		1.250	31.8	0.8 20.3	0.9	1.7	2.6	3.4	4.3	5.1	6.0	6.8	7.7	8.5
2	50	1.250	31.8	0.8 20.3	0.45	0.9	1.4	1.8	2.3	2.7	3.2	3.6	4.1	4.5
					0.9	1.7	2.6	3.4	4.3	5.1	6.0	6.8	7.7	8.5
		1.625	41.3	0.8 20.3	1.4	2.8	4.2	5.6	7.0	8.4	9.8	11.2	12.6	14
3	80	2.625	66.7	1.5 38.1	2.7	5.4	8.1	10.8	13.5	16.2	18.9	21.6	24.3	27
					4.2	8.4	12.6	16.8	21	25.2	29.4	33.6	37.8	42
4	100	2.625	66.7	1.5 38.1	4	8	12	16	20	24	28	32	36	40
					6	12	19	25	31	37	43	50	56	62

Double stage anti-cavitation trim not available with Bellows Seal construction.

21900 Series

Double Stage Lo-dB® Trim

Body Rating: ANSI Class 150 to 600

Sizes: DN 20 to DN 150 - .75" to 6"

Direction: FLOW-TO-OPEN (FTO)

Flow Characteristic: LINEAR

Percent of Travel					10	20	30	40	50	60	70	80	90	100
F _L					0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975
Valve Size		Orifice Diameter		Travel	Rated C _V									
inches	mm	inches	mm	inches mm										
.75 & 1	20 & 25	0.812	20.6	0.8 20.3	0.35	0.70	1.1	1.4	1.8	2.1	2.5	2.8	3.2	3.5
					0.57	1.1	1.7	2.3	2.9	3.4	4.0	4.6	5.1	5.7
1.5	40	1.250	31.8	0.8 20.3	0.70	1.4	2.1	2.8	3.5	4.2	4.9	5.6	6.3	7
					1.3	2.6	3.9	5.2	6.5	7.8	9.1	10.4	11.7	13
		1.625	41.3	0.8 20.3	1.3	2.6	3.9	5.2	6.5	7.8	9.1	10.4	11.7	13
2	50	1.250	31.8	0.8 20.3	2.1	4.2	6.3	8.4	10.5	12.6	14.7	16.8	18.9	21
					4	8	12	16	20	24	28	32	36	40
3	80	2.625	66.7	1.5 38.1	6.3	12.6	18.9	25.2	31.5	37.8	44.1	50.4	56.7	63
					8	17	25	33	42	50	58	66	75	83
4	100	2.625	66.7	1.5 38.1	5.3	10.6	15.9	21.2	26.5	31.8	37.1	42.4	47.7	53
					8	17	25	33	42	50	58	66	75	83
6	150	5.000	127	2.0 50.8	13	25	38	50	63	75	88	100	113	125

C_v and F_L versus Travel for 21100 and 21600 Series

Contoured Trim

Body Rating: ANSI Class 900 to 1500

Sizes: DN 20 to DN 50 - .75" through 2"

Direction: FLOW-TO-OPEN (FTO)

Flow Characteristic: LINEAR

Percent of Travel					10	20	30	40	50	60	70	80	90	100	
F_L					0.93	0.93	0.92	0.92	0.91	0.91	0.91	0.90	0.90	0.90	
Valve Size		Orifice Diameter		Travel	Rated C_v										
inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	
.75 & 1	20 & 25	0.250	6.4	0.8	20.3	0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7
		0.375	9.5	0.8	20.3	0.34	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8
		0.500	12.7	0.8	20.3	0.54	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6
		0.812	20.6	0.8	20.3	1.1	2.2	3.2	4.3	5.4	6.7	7.9	9.2	11	12
1.5	40	0.250	6.4	0.8	20.3	0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7
		0.375	9.5	0.8	20.3	0.34	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8
		0.500	12.7	0.8	20.3	0.54	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6
		0.812	20.6	0.8	20.3	1.2	2.3	3.5	4.6	5.9	7.2	8.6	10	11	13
		1.250	31.8	0.8	20.3	2.3	4.5	6.8	8.9	11	14	17	19	22	25
		1.625	41.3	0.8	20.3	3.2	6.3	9.5	12	16	19	23	27	31	35
2	50	0.250	6.4	0.8	20.3	0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7
		0.375	9.5	0.8	20.3	0.34	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8
		0.500	12.7	0.8	20.3	0.54	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6
		0.812	20.6	0.8	20.3	1.4	2.7	4.1	5.3	6.8	8.3	9.9	12	13	15
		1.250	31.8	0.8	20.3	2.3	4.7	7.0	9.2	12	14	17	20	23	26
		1.625	41.3	0.8	20.3	4.1	8.3	12	16	21	26	30	35	40	46

Quick Change Trim Only

Contoured Trim

Body Rating: ANSI Class 900 to 1500

Sizes: DN 20 to DN 50 - .75" to 2"

Direction: FLOW-TO-OPEN (FTO)

Flow Characteristic: EQUAL PERCENTAGE

Percent of Travel					10	20	30	40	50	60	70	80	90	100	
F_L					0.93	0.93	0.93	0.93	0.93	0.92	0.92	0.91	0.91	0.9	
Valve Size		Orifice Diameter		Travel	Rated C_v										
inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	
.75 & 1.00	20 & 25	0.250	6.4	0.8	20.32	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.32	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.0	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.43	0.61	0.84	1.3	2.3	4.3	6.8	8.9	11	12
1.50	40	0.250	6.4	0.8	20.3	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.3	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.05	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.39	0.58	0.86	1.36	2.3	3.9	6.1	8.6	11	13
		1.250	31.8	0.8	20.3	0.90	1.28	1.76	2.8	4.7	9.0	14	19	22	25
		1.625	41.3	0.8	20.3	1.27	1.79	2.46	3.9	6.6	12.6	20	26	31	35
2	50	0.250	6.4	0.8	20.3	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.3	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.0	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.45	0.67	0.99	1.6	2.6	4.5	7.7	12	17	23
		1.250	31.8	0.8	20.3	0.77	1.2	1.7	2.7	4.5	7.7	12	17	23	26
		1.625	41.3	0.8	20.3	1.7	2.3	3.2	5.1	8.7	17	26	34	41	46

ANSI Class 900 to 1500 available only in sizes .75" to 2".

Quick Change Trim Only

C_v and F_L versus Travel for 21100 and 21600 Series

Contoured Trim

Body Rating: ANSI Class 2500

Sizes: DN 20 to DN 50 - .75" through 2"

Direction: **FLOW-TO-OPEN (FTO)**

Flow Characteristic: **LINEAR**

Percent of Travel					10	20	30	40	50	60	70	80	90	100	
F_L					0.93	0.96	0.92	0.92	0.91	0.91	0.91	0.91	0.9	0.9	
Valve Size		Orifice Diameter		Travel	Rated C_v										
inches	mm	inches	mm	inches	mm										
.75	20	0.250	6.4	0.8	20.3	0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7
		0.375	9.5	0.8	20.3	0.34	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8
		0.500	12.7	0.8	20.3	0.54	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6
		0.812	20.6	0.8	20.3	0.7	1.4	2.2	2.8	3.6	4.4	5.3	6.2	7	8
1	25	0.250	6.4	0.8	20.3	0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7
		0.375	9.5	0.8	20.3	0.34	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8
		0.500	12.7	0.8	20.3	0.54	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6
		0.812	20.6	0.8	20.3	0.9	1.8	2.7	3.6	4.5	5.6	6.6	7.7	9	10
1.5	40	0.250	6.4	0.8	20.3	0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7
		0.375	9.5	0.8	20.3	0.34	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8
		0.500	12.7	0.8	20.3	0.54	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6
		0.812	20.6	0.8	20.3	1.2	2.3	3.5	4.6	5.9	7.2	8.6	10	11	13
		1.250	31.8	0.8	20.3	1.8	3.6	5.4	7.1	9	11	13	15	18	20
		1.625	41.3	0.8	20.3	2.3	4.5	6.8	9	11	14	17	19	22	25
2	50	0.250	6.4	0.8	20.3	0.15	0.31	0.46	0.60	0.77	0.94	1.1	1.3	1.5	1.7
		0.375	9.5	0.8	20.3	0.34	0.68	1.0	1.3	1.7	2.1	2.5	2.9	3.3	3.8
		0.500	12.7	0.8	20.3	0.54	1.1	1.6	2.1	2.7	3.3	4.0	4.6	5.3	6
		0.812	20.6	0.8	20.3	1.4	2.7	4.1	5.3	6.8	8.3	9.9	12	13	15
		1.250	31.8	0.8	20.3	2.3	4.7	7.0	9.2	12	14	17	20	23	26
		1.625	41.3	0.8	20.3	3.2	6.3	9	12	16	19	23	27	31	35

Quick Change Trim Only

Contoured Trim

Body Rating: ANSI Class 2500

Sizes: DN 20 to DN 50 - .75" through 2"

Direction: **FLOW-TO-OPEN (FTO)**

Flow Characteristic: **EQUAL PERCENTAGE**

Percent of Travel					10	20	30	40	50	60	70	80	90	100	
F_L					0.93	0.93	0.93	0.93	0.93	0.92	0.92	0.91	0.91	0.9	
Valve Size		Orifice Diameter		Travel	Rated C_v										
inches	mm	inches	mm	inches	mm										
.75	20	0.250	6.4	0.8	20.32	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.32	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.1	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.29	0.41	0.56	0.9	1.5	2.9	4.5	6.0	7	8
1	25	0.250	6.4	0.8	20.3	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.32	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.1	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.36	0.51	0.70	1.1	1.9	3.6	5.6	7.4	9	10
1.5	40	0.250	6.4	0.8	20.3	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.3	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.05	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.39	0.58	0.86	1.36	2.3	3.9	6.1	8.6	11	13
		1.250	31.8	0.8	20.3	0.72	1.02	1.40	2.2	3.8	7.2	11	15	18	20
		1.625	41.3	0.8	20.3	0.90	1.28	1.76	2.8	4.7	9.0	14	19	22	25
2	50	0.250	6.4	0.8	20.3	0.05	0.08	0.11	0.18	0.30	0.5	0.8	1.1	1.5	1.7
		0.375	9.5	0.8	20.3	0.11	0.17	0.25	0.40	0.66	1.1	1.8	2.5	3.3	3.8
		0.500	12.7	0.8	20.3	0.18	0.27	0.40	0.63	1.0	1.8	2.8	4.0	5.2	6
		0.812	20.6	0.8	20.3	0.45	0.67	0.99	1.6	2.6	4.5	7.7	12	17	23
		1.250	31.8	0.8	20.3	0.77	1.2	1.7	2.7	4.5	7.7	12	17	23	26
		1.625	41.3	0.8	20.3	1.3	1.8	2.5	3.9	6.6	13	20	26	31	35

ANSI Class 2500 available only in sizes .75" to 2".

Quick Change Trim Only

C_v and F_L versus Travel for 21700 Series

Single Stage Lo-dB®/Anti-Cavitation Trim

Body Rating: ANSI Class 900 to 2500

Sizes: DN 20 to DN 50 - .75" to 2"

Direction: FLOW-TO-OPEN (FTO)

& FLOW-TO-CLOSE (FTC)

Flow Characteristic: LINEAR

Percent of Travel				10	20	30	40	50	60	70	80	90	100		
F _L				0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93		
Valve Size		Orifice Diameter		Travel		Rated C _v									
inches	mm	inches	mm	inches	mm										
.75 & 1	20 & 25	0.812	20.6	0.8	20.3	0.40	0.80	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4
						0.80	1.6	2.4	3.2	4.0	4.8	5.6	6.4	7.2	8
1.5	40	1.250	31.8	0.8	20.3	0.80	1.6	2.4	3.2	4.0	4.8	5.6	6.4	7.2	8
						1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15
2	50	1.250	31.8	0.8	20.3	0.80	1.6	2.4	3.2	4.0	4.8	5.6	6.4	7.2	8
						1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15
		1.625	41.3	0.8	20.3	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25

 Quick Change Trim Only

21800 Series

Double Stage Anti-Cavitation Trim

Body Rating: ANSI Class 900 to 2500

Sizes: DN 20 to DN 50 - .75" to 2"

Direction: FLOW-TO-CLOSE (FTC)

Flow Characteristic: LINEAR

Percent of Travel				10	20	30	40	50	60	70	80	90	100		
F _L				0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975		
Valve Size		Orifice Diameter		Travel		Rated C _v									
inches	mm	inches	mm	inches	mm										
.75 & 1	20 & 25	0.812	20.6	0.8	20.3	0.23	0.46	0.7	0.9	1.2	1.4	1.6	1.8	2.1	2.3
						0.45	0.9	1.4	1.8	2.3	2.7	3.2	3.6	4.1	4.5
1.5	40	0.812	20.6	0.8	20.3	0.23	0.5	0.7	0.9	1.2	1.4	1.6	1.8	2.1	2.3
		1.250	31.8	0.8	20.3	0.45	0.9	1.4	1.8	2.3	2.7	3.2	3.6	4.1	4.5
						0.9	1.7	2.6	3.4	4.3	5.1	6.0	6.8	7.7	8.5
2	50	1.250	31.8	0.8	20.3	0.45	0.9	1.4	1.8	2.3	2.7	3.2	3.6	4.1	4.5
						0.9	1.7	2.6	3.4	4.3	5.1	6.0	6.8	7.7	8.5
		1.625	41.3	0.8	20.3	1.4	2.8	4.2	5.6	7.0	8.4	9.8	11.2	12.6	14

21900 Series

Double Stage Lo-dB® Trim

Body Rating: ANSI Class 900 to 2500


Sizes: DN 20 to DN 50 - .75" to 2"

Direction: FLOW-TO-OPEN (FTO)


Flow Characteristic: LINEAR

Percent of Travel				10	20	30	40	50	60	70	80	90	100		
F _L				0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975		
Valve Size		Orifice Diameter		Travel		Rated C _v									
inches	mm	inches	mm	inches	mm										
.75 & 1	20 & 25	0.812	20.6	0.8	20.3	0.35	0.70	1.1	1.4	1.8	2.1	2.5	2.8	3.2	3.5
						0.57	1.1	1.7	2.3	2.9	3.4	4.0	4.6	5.1	5.7
1.5	40	0.812	20.6	0.8	20.3	0.70	1.4	2.1	2.8	3.5	4.2	4.9	5.6	6.3	7
						1.3	2.6	3.9	5.2	6.5	7.8	9.1	10.4	11.7	13
		1.250	31.8	0.8	20.3	1.3	2.6	3.9	5.2	6.5	7.8	9.1	10.4	11.7	13
2	50	1.250	31.8	0.8	20.3	2.1	4.2	6.3	8.4	10.5	12.6	14.7	16.8	18.9	21
		1.625	41.3	0.8	20.3										


Materials of Construction

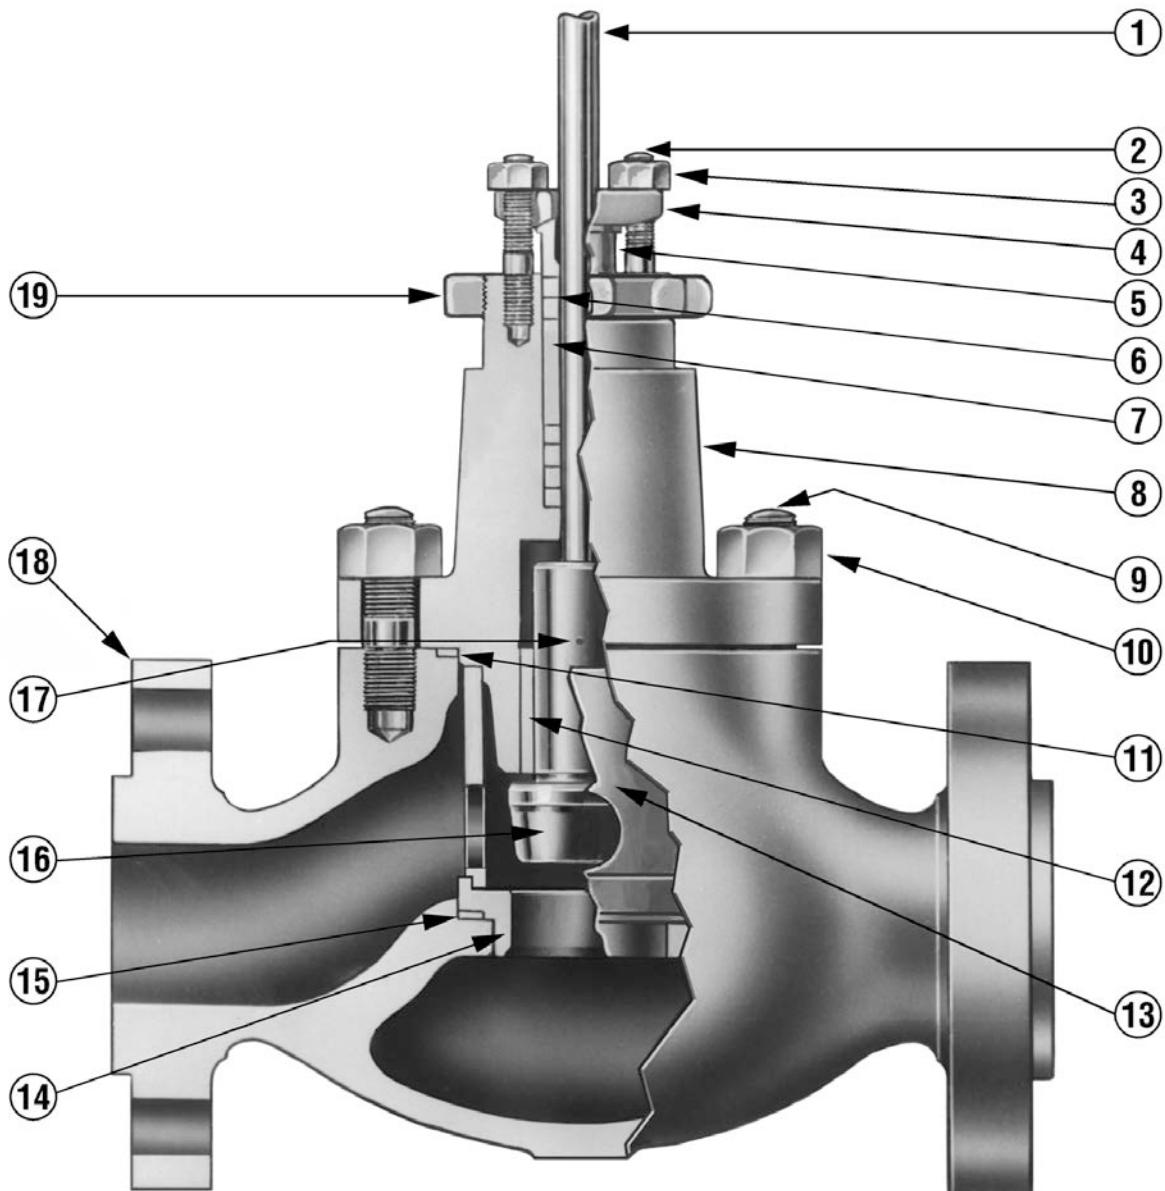

Standard Construction

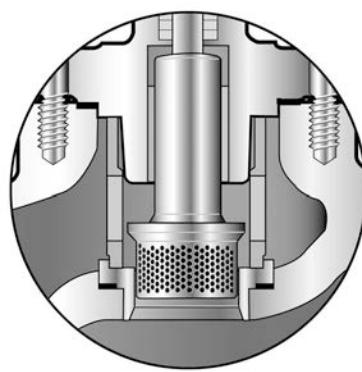

Single Stage Lo-dB®/
Anti-Cavitation Trim

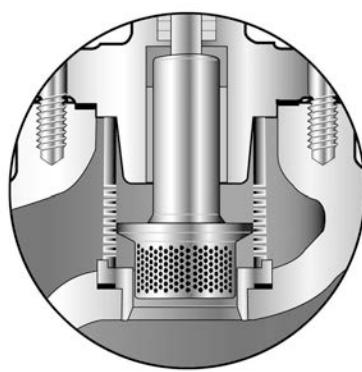

Double Stage Lo-dB®/
Anti-Cavitation Trim

Materials of Construction

Standard Carbon Steel Version

Ref. No.	Temperature Range	-20°F ↓	450°F ▽	650°F ▽	800°F ▽
Description		Standard Materials			
1	Plug Stem	17-4 PH St. St. ASTM A564 Gr 630		See optional mat'l's	
2	Packing Flange Stud	304 St. St. ASTM A193 GR B8			
3	Packing Flange Nut	304 St. St. ASTM A194 GR 8			
4	Packing Flange	Carbon Steel ASTM A668 CL B or ASTM A216 GR WCC			
5	Packing Follower	300 Series Austenitic Stainless Steel			
6	Packing	Kevlar PTFE (Crane 285K) with Std. Bonnet		See optional materials	
		Kevlar PTFE (Crane 285K) with Ext. Bonnet			
7	Lantern Ring (Optional)	300 Series Austenitic Stainless Steel			
8	Valve Bonnet	Carbon Steel ASTM A216 Grade WCC or ASTM A105			
9	Body Stud	Alloy Steel ASTM A193 GR B7			
10	Body Stud Nut	Carbon Steel ASTM A194 GR 2H			
11	Body Gasket	316L St. St. w/Flexible Graphite Filler (Spiral Wound)			
12	Guide Bushing	440C St. St. ASTM A276 TY 440C ⁽¹⁾			
13	Cage ⁽²⁾ /Retainer	304 St. St. ASTM A351 GR CF8			
14	Seat Ring	400 Series Martensitic Stainless Steel		See optional mat'l's	
15	Seat Ring Gasket	316L St. St. w/Flexible Graphite Filler (Spiral Wound)			
16	Plug	400 Series Martensitic Stainless Steel		See optional mat'l's	
17	Plug Pin	303 St. St. ASTM A582 TY 303			
18	Valve Body	Carbon Steel ASTM A216 Grade WCC			
19	Drive Nut	Carbon Steel SAE 1117 or ASTM A216 GR WCC			
Ref. No.	Temperature Range	-29°C ↑	△ 232°C	△ 343°C	427°C △

1. 440C bushing not supplied with Stainless Steel Body/Bonnet or in combination with 316 Trim.

2. Required for Quick Change Trim option only.

Standard Stainless Steel Version ⁽¹⁾

Ref. No.	Temperature Range	-20°F ↓	650°F ▽	800°F ▽
Description		Standard Materials		
1	Plug Stem	316 St. St. ASTM A479 TY 316		See optional mat'l's
8	Valve Bonnet	316 St. St. ASTM A351 GR CF8M		
18	Valve Body	Nitronic 60 ASTM A479 TY 21800		See optional mat'l's
12	Guide Bushing	316 St. St. ASTM A479 TY 316		
14	Seat Ring	316 St. St. ASTM A479 TY 316		
16	Plug	316 St. St. ASTM A479 TY 316		See optional mat'l's
Ref. No.	Temperature Range	-29°C ↑	△ 343°C	427°C △

1. Materials for other components are same as listed for Standard Carbon Steel Version.

2. Consult Masoneilan for material combinations for temperatures below -20°F (-29°C) or above 800°F (427°C).




Review use of optional materials and configurations for temperature ranges indicated. Standard materials listed may still be applicable depending on specific service conditions. Consult Masoneilan for appropriate material combinations.

Materials of Construction


Optional Configurations & Materials

Ref. No.	Temperature Range	-20°F	450°F	650°F	800°F		
	Description	Standard Materials					
1	Plug Stem	A286 Super Alloy ASTM A638 GR 660		Inconel X-750 ASTM B637 GR 688			
		LE® Packing ⁽¹⁾ with Std. Bonnet		LE® Packing ⁽¹⁾ with Ext. Bonnet			
6	Packing	Flexible Graphite					
8	Valve Bonnet	Chrome-Moly Steel ASTM A217 Grade WC9					
18	Valve Body						
9	Body Stud ⁽²⁾	304 St. St. ASTM A193 GR B8 CL 2					
10	Body Stud Nut ⁽²⁾	304 St. St. ASTM A194 GR 8					
12	Guide Bushing	Stellite 6 UNS 30006					
13	Cage / Retainer ⁽³⁾	Martensitic St. St. ASTM A487 GR CA6NM CL B					
	Cage/ Seat ⁽⁶⁾	400 Series Martensitic Stainless Steel					
		Monel K 500					
		Stellite 6 UNS 30006					
14	Seat Ring	316 St. St. ASTM A479 TY 316 with Hardfaced Seat					
16	Plug	316 St. St. ASTM A479 TY 316 with Teflon Soft Seat					
		316 St. St. ASTM A479 TY 316 with Hardfaced Seat					
		316 St. St. ASTM A479 TY 316 with Hardfaced Seat & Guide ^{(4) (6)}					
		Monel K 500 ⁽⁶⁾					
		Stellite 6 UNS 30006 ^{(4) (6)}					
Ref. No.	Temperature Range	-29°C	232°C	343°C	427°C		


1. LE Packing for low emissions applications is limited to maximum operating pressure and temperature as shown in the chart on page 14.
2. Optional stainless steel bolting materials for corrosive ambient environments. Consult Masoneilan for specific pressure and temperature limitations.
3. Required for Quick Change Trim option only. Recommended material option for ANSI Class 900 and above.
4. Recommended material for use along with solid Stellite bushing for applications above 650°F (343°C).
5. Consult Masoneilan for material combinations for temperatures below -20°F (-29°C) or above 800°F (427°C).
6. Optional component and materials for Close Clearance low flow trim options.

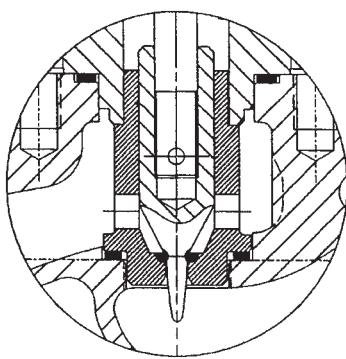

21000 Close Clearance
Low Flow Trim

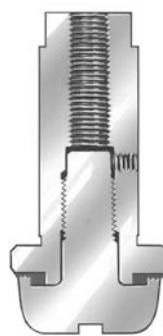

Soft Seated
Plug S/A

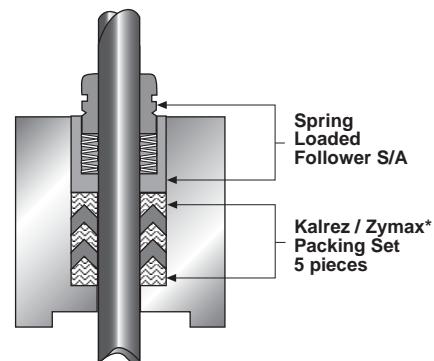

LE® Packing System (Optional)
Low Emission Stem Packing

Bellows Seal Design Features - 21000 BS Series

Standard Construction

Bellows seal configuration is fully compatible with the standard 21000 Series trim and actuator options providing equivalent capacity capabilities for each valve size. The standard packing box design and packing design options are used as a secondary stem seal.

Rugged Design

The formed bellows construction is an externally pressurized design that is capable of operating up to the full valve ANSI B16.34 pressure rating. Guides are located above and below the bellows providing excellent stability to withstand flow induced and mechanical vibration.

Maximum Life

The bellows assembly is designed for 50% compression/extension to achieve zero stress at the valve mid-stroke position for maximum cycle life. Bellows torsional stresses are also minimized with the anti-rotation feature provided by flats on the plug stem.

High Quality

Each bellows subassembly is helium leak tested to verify weld integrity, and is also hydro-statically tested as part of the

complete valve assembly. Mechanical travel stops are also designed into both the bellows and valve assemblies to prevent over compression or extension.

Smart Solution

Bellows installed cycle life can be monitored in the field by utilizing Masoneilan's SVI® Digital Positioner with actual process data. This unique preventative maintenance option will help improve plant safety by identifying potential hazardous failures before they happen, and reduce cost by eliminating premature Bellows replacement.

Bellows Materials

Standard Material

316/316L Stainless Steel



Optional Materials

Hastelloy C276

Monel 400

Inconel 625

See pages 15 and 16 for full materials listing.

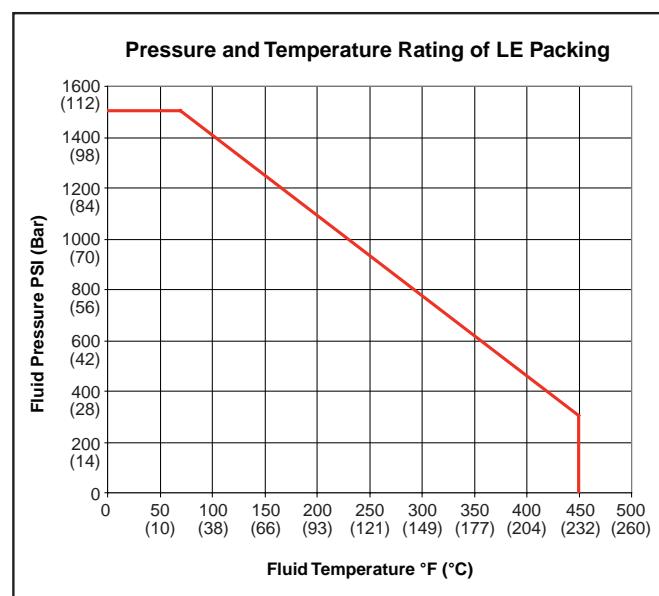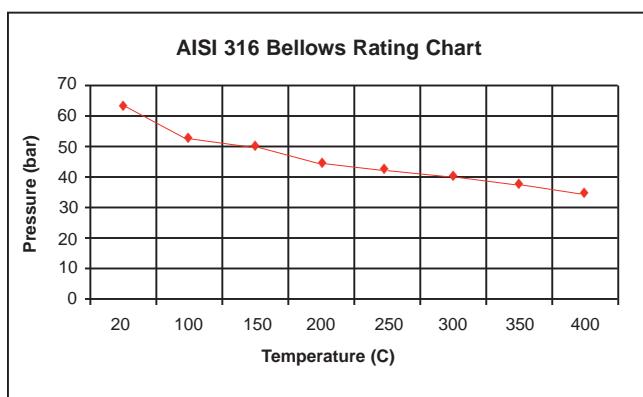

Size and Ratings


Pressure Ratings: ANSI Class 150 and 300 – PN 10 and PN 50

Valve Size	Bellows Design Stroke		Life Cycle Ratings ⁽¹⁾		
	inches	mm	Maximum Stroke		
			100%	50%	25%
.75"-2"	.75	19	100,000 Full Cycles	600,000 Full Cycles	3,000,000 Full Cycles
3"-4"	1.50	38.1			
6"	2.00	50.8			

1. Minimum expected average cycle life for Class 300 bellows operating at constant pressure.

2. Consult Masoneilan for Bellows applications above ANSI Class 300.

Materials of Construction

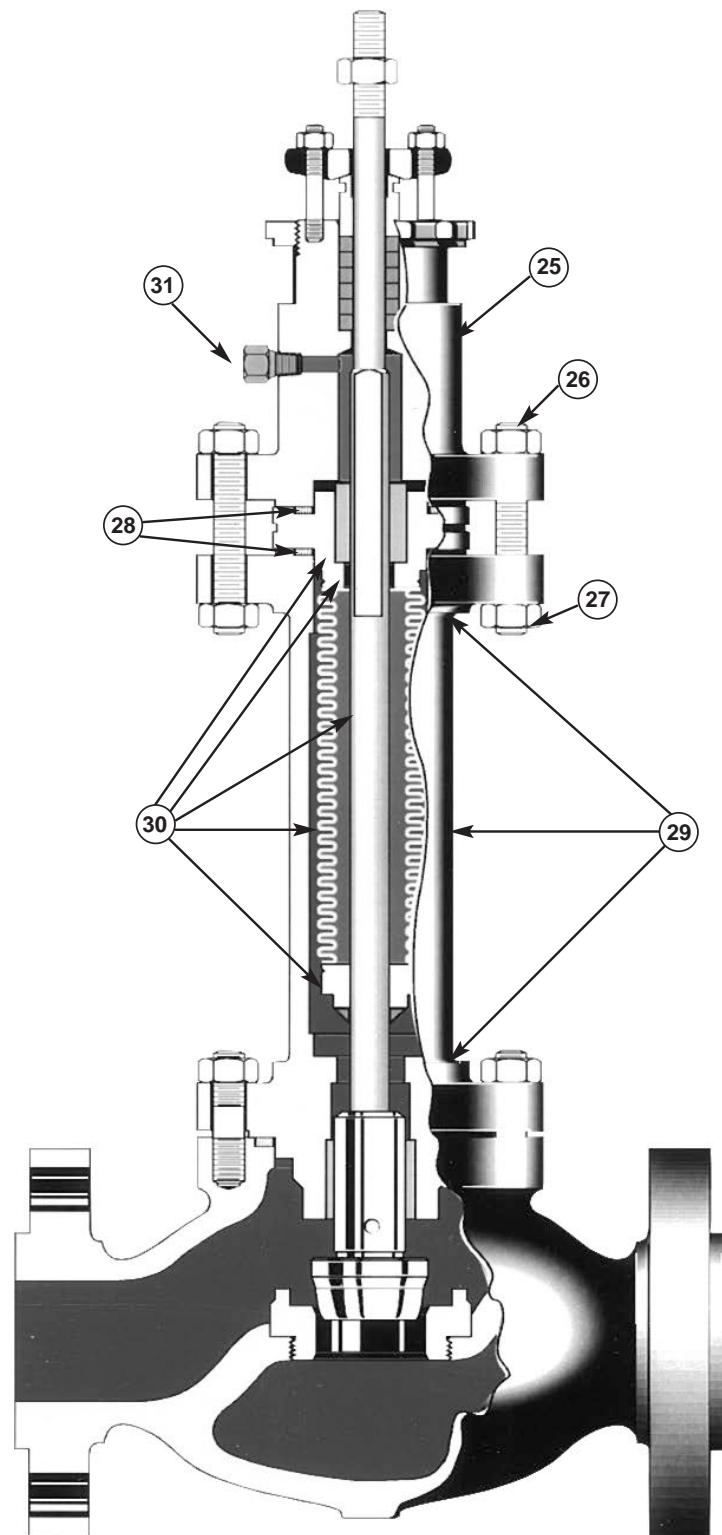

Bellows Seal Construction

Materials of Construction

Bellows Seal - Carbon Steel Body Version ⁽¹⁾

Valve Sizes: .75" to 6"

Body Ratings: ANSI Class 150 to 300

Ref. No.	Temperature Range	-20°F	800°F
Standard and Optional Materials			
25	Valve Bonnet	Carbon Steel ASTM A216 GR WCC or ASTM A105	
26	Bonnet Stud	304 St. St. ASTM A193 GR B7	
27	Bonnet Stud Nut	Alloy Steel ASTM A194 GR 2H	
28	Bonnet Spacer Gasket	316L St. St. w/Flexible Graphite Filler (Spiral Wound)	
29	Bonnet Extension Assembly		
	Upper Flange	Carbon Steel ASTM A216 GR WCC or ASTM A105	
	Spacer	Carbon Steel ASTM A106 GR B	
	Lower Flange	Carbon Steel ASTM A216 GR WCC	
30	Bellows and Stem Assembly		
	Stem	316 St. St. ASTM A479 TY 316	
	Guide Bushing	Nitronic 60 ASTM A479 TY21800	
	Bellows	316/316L St. St. ASTM A240/A312	
	Upper Adapter		316L St. St. ASTM A479 TY 316L
	Lower Adapter		
30	Bellows and Stem Assembly		Hastelloy Bellows
	Stem		Hastelloy C ASTM B574
	Guide Bushing		Stellite 6 UNS 30006
	Bellows		Hastelloy C276 ASTM B575/B622
	Upper Adapter		
	Lower Adapter		Hastelloy C ASTM B574
31	1/8" NPT Plug		300 Series Stainless Steel
Ref. No.	Temperature Range	-29°C	427°C

Notes:

1. Materials for other components are same as listed for Standard Carbon Steel Version.
2. Items No. 1 and 8 in Standard Materials of Construction tables are replaced by items above.

Bellows Seal - Stainless Steel Body Version ⁽¹⁾

Ref. No.	Temperature Range	-20°F	800°F
Standard and Optional Materials			
25	Valve Bonnet	316 St. St. ASTM A351 GR CF8M	
29	Bonnet Extension Assembly		
	Upper Flange	316 St. St. ASTM A351 GR CF8M or ASTM A182 GR F316	
	Spacer	316 St. St. ASTM A269 TY 316	
	Lower Flange	316 St. St. ASTM A351 GR CF8M	
Ref. No.	Temperature Range	-29°C	427°C

1. Materials for other Bellows components are same as listed for Carbon Steel Body – Bellows Seal Version.

2. Materials for other components are same as listed for Standard Stainless Steel Version.

Materials of Construction

NACE⁽¹⁾ Configuration and Material Options


Valve Sizes: .75" to 6"

Body Ratings: ANSI Class 150 to 600 ⁽⁴⁾

Ref. No.	Temperature Range	-20°F	450°F
	Description	Standard and Optional Materials	
1	Plug Stem	316 St. St. ASTM A479 TY 316 (HRC 22 Max.)	
2	Packing Flange Stud	304 St. St. ASTM A193 GR B8 ⁽²⁾	
		Alloy Steel ASTM A193 Gr B7M ⁽³⁾	
3	Packing Flange Nut	304 St. St. ASTM A194 GR B8 ⁽²⁾	
		Alloy Steel ASTM A194 Gr 2HM ⁽³⁾	
4	Packing Flange	Carbon Steel ASTM A668 CL B	
5	Packing Follower	304 St. St. ASTM A479 TY 304	
6	Packing	Kevlar PTFE (Crane 285K)	
7	Lantern Ring (Optional)	304 St. St. ASTM A479 TY 304	
8	Valve Bonnet	Carbon Steel ASTM A216 Grade WCC (HRC 22 Max.)	
		Carbon Steel ASTM A105 (HRC 22 Max.)	
		316 St. St. ASTM A351 Gr CF8M (HRC 22 Max.)	
9	Body Stud	Alloy Steel ASTM A193 GR B7 ⁽²⁾	
		Alloy Steel ASTM A193 Gr B7M ⁽³⁾	
10	Body Stud Nut	Alloy Steel ASTM A194 GR 2H ⁽²⁾	
		Alloy Steel ASTM A194 Gr 2HM ⁽³⁾	
11	Body Gasket	316L St. St. w/Flexible Graphite Filler (Spiral Wound)	
12	Guide Bushing	Stellite 6 UNS 30006	
		316 St. St. ASTM A479 TY 316 with Hardfacing ⁽⁵⁾ (HRC 22 Max.)	
13	Cage	304 St. St. ASTM A351 CF8 (HRC 22 Max.)	
	Cage/Seat ⁽⁵⁾	Monel K 500	
		Stellite 6 UNS 30006	
14	Seat Ring	316 St. St. ASTM A479 TY 316 (HRC 22 Max.)	
		316 St. St. ASTM A479 TY 316 with Hardfaced Seat (HRC 22 Max.)	
15	Seat Ring Gasket	316L St. St. w/Flexible Graphite Filler (Spiral Wound)	
16	Plug	316 St. St. ASTM A479 TY 316 (HRC 22 Max.)	
		316 St. St. ASTM A479 TY 316 with Hardfaced Seat (HRC 22 Max.)	
		316 St. St. ASTM A479 TY 316 with Hardfaced Seat & Guide ⁽⁵⁾	
		Monel K 500 ⁽⁵⁾	
		Stellite 6 UNS 30006 ⁽⁵⁾	
17	Plug Pin	316 St. St. ASTM A479 TY 316 (HRC 22 Max.)	
18	Valve Body	Carbon Steel ASTM A216 Grade WCC (HRC 22 Max.)	
		316 St. St. ASTM A351 Gr CF8M (HRC 22 Max.)	
19	Drive Nut	Carbon Steel SAE 1117 ⁽²⁾	
		Carbon Steel ASTM A105 or SAE 1010-1025 ⁽³⁾	
Ref. No.	Temperature Range	-29°C	232°C

1. Materials and processes in accordance with the requirements of NACE specification MR0103.
Applications requiring compliance to MR0175, 2003 Rev. or ISO 15156 would require engineering review.
2. Materials designated for these parts conform to NACE Class III (unexposed) bolting requirements.
3. Materials designated for these parts conform to NACE Class I or Class II (exposed) bolting requirements.
4. Consult Masoneilan for NACE Applications above ANSI Class 600 rating.
5. Optional component and materials for Close Clearance low flow trim option.

Dimensions (inches)

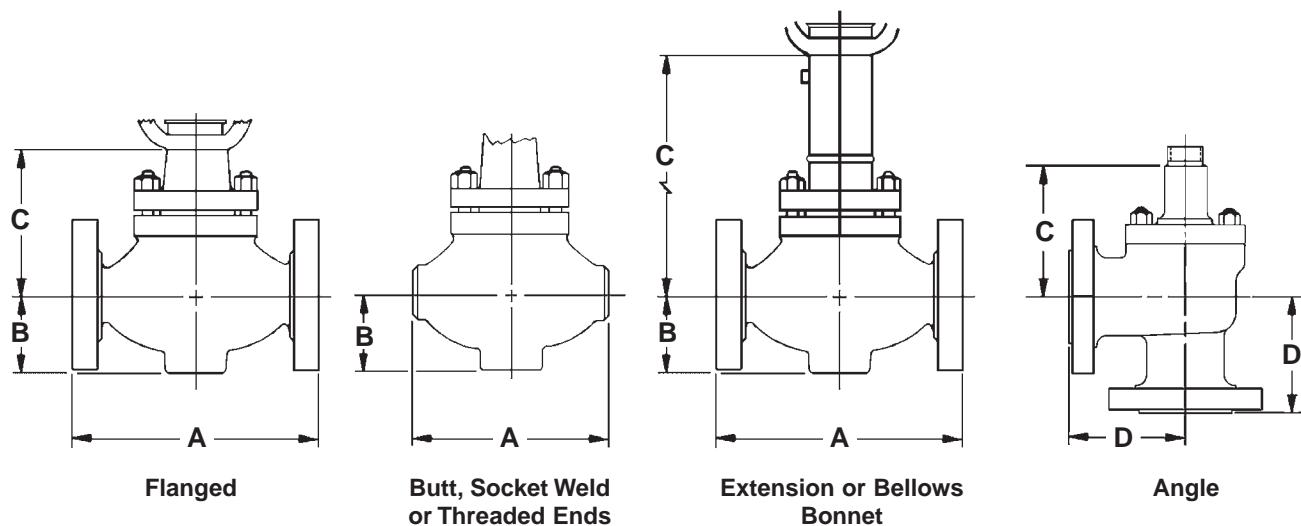


21000 Series Dimensions (inches)

ANSI Class 150 through 2500 and equivalent PN

Valve Size (inches)	A															
	ANSI Class 150-600		ANSI Class 900-1500		ANSI Class 2500		ANSI Class 150		ANSI Class 300		ANSI Class 600		ANSI Class 900-1500		ANSI Class 2500	
	BW	SW & THD	SW	BW	SW	BW	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ
0.75		8.25	8.50		12.50		7.24		7.62	8.12	8.12	8.12	10.75	10.75	12.12	12.12
1		8.25	8.50		12.50		7.25	7.75	7.75	8.25	8.25	8.25	11.50	11.50	12.50	12.50
1.5		9.88	9.25		13.00		8.75	9.25	9.25	9.75	9.88	9.90	13.12	13.12	14.12	14.24
2	11.25	11.25	11.50	11.50	14.75	14.75	10.00	10.50	10.50	11.12	11.25	11.38	14.75	14.88	16.25	16.37
3	13.24						11.75	12.25	12.50	13.12	13.25	13.38				
4	15.50						13.88	14.38	14.50	15.12	15.50	15.62				
6	20.00						17.75	18.12	18.62	19.24	20.00	20.12				

Valve Size (inches)	B												
	ANSI Class 150-300	ANSI Class 600	ANSI Class 150-600	ANSI Class 900-1500		ANSI Class 2500		ANSI Class 150		ANSI Class 300	ANSI Class 600	ANSI Class 900- 1500	ANSI Class 2500
	BW	BW	SW & THD	BW	SW	BW	SW	RF	RTJ	RF & RTJ	RF & RTJ	RF & RTJ	
0.75			1.83		1.76		1.87	1.94		2.32	2.32	2.56	2.75
1			1.83		2.06		2.22	2.13	2.45	2.45	2.45	2.94	3.13
1.5			2.50		2.68		2.93	2.50	3.06	3.06	3.06	3.50	4.00
2	3.00	3.00	3.00	3.37	3.37	3.70	3.70	3.00	3.25	3.25	3.25	4.25	4.63
3	3.69	3.69						3.75	4.13	4.13	4.13		
4	4.63	5.50						4.50	5.00	5.00	5.38		
6	6.26	7.38						5.50	6.25	6.25	7.00		

Dimensions (inches)

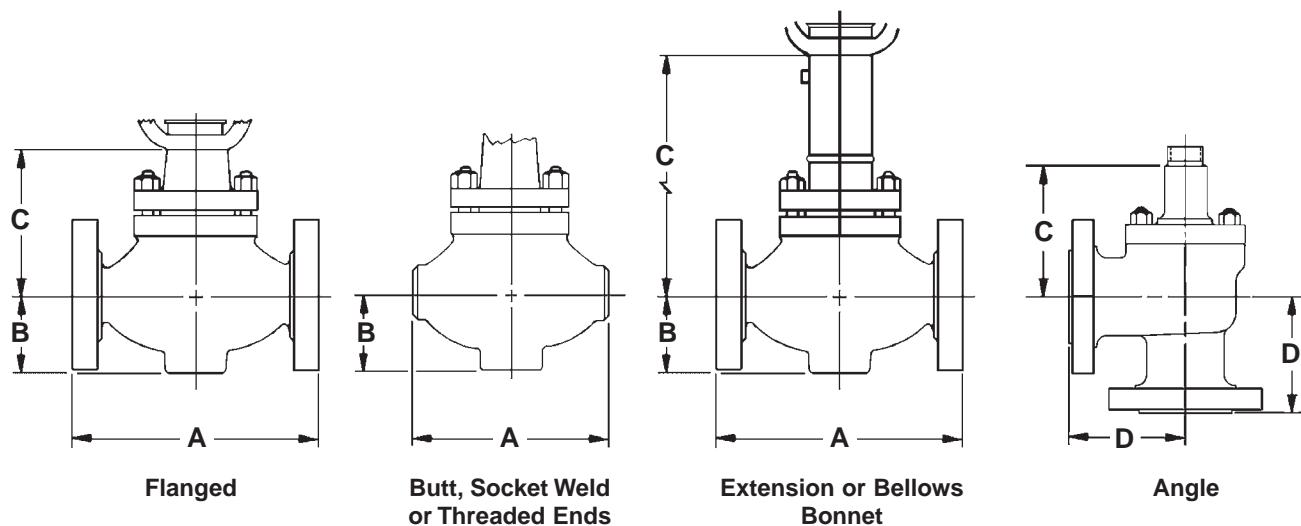


21000 Series Dimensions (inches)

ANSI Class 150 through 2500 and equivalent PN

Valve Size (inches)	C								Bellows Bonnet	
	Standard Bonnet				Extension Bonnet					
	ANSI Class 150-300	ANSI Class 600	ANSI Class 900-1500	ANSI Class 2500	ANSI Class 150-300	ANSI Class 600	ANSI Class 900-1500	ANSI Class 2500		
0.75	5.60	5.60	7.60	7.60	9.80	9.80	10.70	10.70	16.83	
1	5.60	5.60	7.60	7.60	9.80	9.80	10.70	10.70	16.83	
1.5	5.50	5.50	9.00	9.00	10.00	10.00	11.70	11.70	15.22	
2	5.50	5.50	9.00	10.70	10.00	10.00	11.70	12.30	15.22	
3	8.00	8.00			12.50	12.50			23.75	
4	8.10	9.40			12.60	12.60			23.87	
6	11.20	11.10			16.70	16.60			29.76	

Valve Size (inches)	D												
	ANSI Class 150-600	ANSI Class 900-1500	ANSI Class 2500	ANSI Class 150		ANSI Class 300		ANSI Class 600		ANSI Class 900-1500		ANSI Class 2500	
	BW, SW & THD	BW, SW & THD	BW, SW & THD	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ
0.75	4.13	4.25	6.25	3.62		3.88	4.13	4.13	4.13	5.38	5.38	6.06	6.06
1	4.12	4.25	6.25	3.62		3.87	4.13	4.13	4.13	5.75	5.75	6.25	6.25
1.5	4.94	4.63	6.50	4.38		4.63	4.88	4.95	4.94	6.56	6.56	7.06	7.12
2	5.63	5.57	7.38	5.00		5.25	5.56	5.63	5.69	7.38	7.44	8.13	8.19
3	6.63			5.88		6.25	6.56	6.63	6.69				
4	7.75			6.94		7.25	7.56	7.75	7.81				
6	10.00			8.88		9.31	9.63	10.00	10.06				

Dimensions (mm)

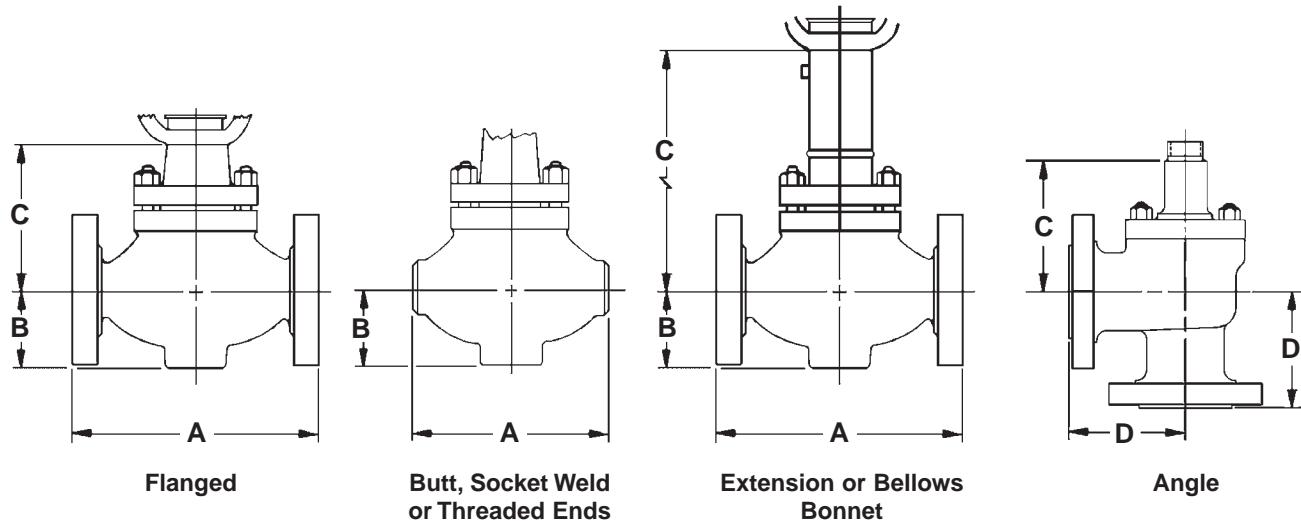


21000 Series Dimensions (mm)

ANSI Class 150 through 2500 and equivalent PN

Valve Size (mm)	A															
	ANSI Class 150-600		ANSI Class 900-1500		ANSI Class 2500		ANSI Class 150		ANSI Class 300		ANSI Class 600		ANSI Class 900-1500		ANSI Class 2500	
	BW	SW & THD	SW	BW	SW	BW	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ
0.75		210	216		318		184		194	206	206	206	273	273	308	308
1		210	216		318		184	197	197	210	210	210	292	292	318	318
1.5		251	235		330		222	235	235	248	251	251	333	333	359	362
2	286	286	292	292	375	286	254	267	267	282	286	289	375	378	413	416
3	336						298	311	318	333	337	340				
4	394						353	365	368	384	394	397				
6	508						451	460	473	489	508	511				

Valve Size (mm)	B												
	ANSI Class 150-300	ANSI Class 600	ANSI Class 150-600	ANSI Class 900-1500		ANSI Class 2500		ANSI Class 150		ANSI Class 300	ANSI Class 600	ANSI Class 900- 1500	ANSI Class 2500
	BW	BW	SW & THD	BW	SW	BW	SW	RF	RTJ	RF & RTJ	RF & RTJ	RF & RTJ	RF & RTJ
0.75			46		45		47	49		59	59	65	70
1			46		52		56	54	62	62	62	75	80
1.5			64		68		74	64	78	78	78	89	102
2	76	76	76	86	86	94	94	76	83	83	83	108	118
3	94	94						95	105	105	105		
4	118	140						114	127	127	137		
6	159	187						140	159	159	178		

Dimensions (mm)

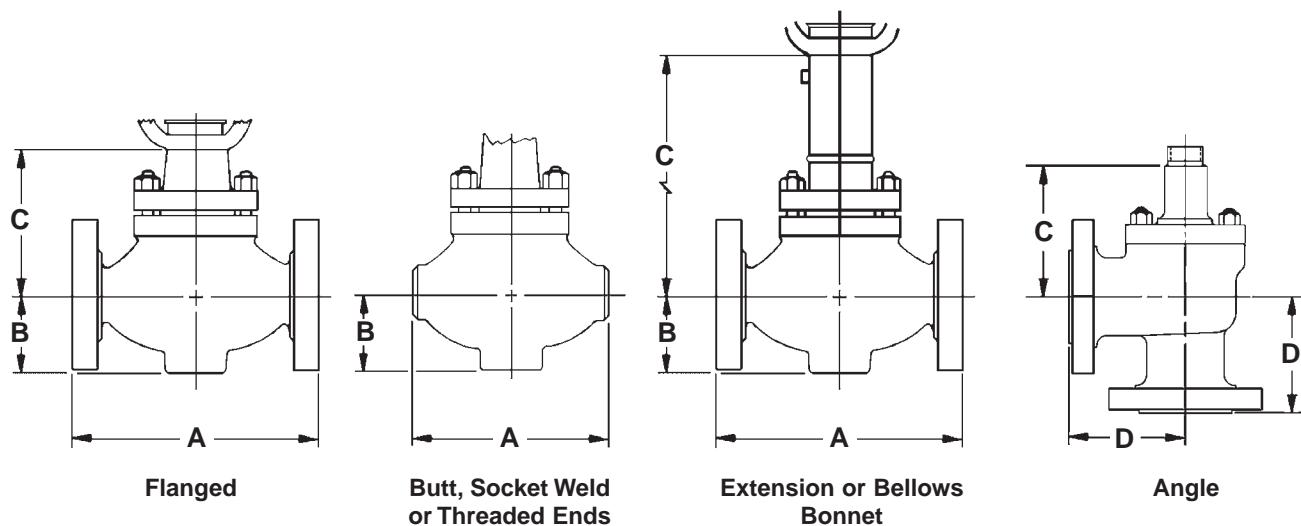

21000 Series Dimensions (mm)

ANSI Class 150 through 2500 and equivalent PN

Valve Size (mm)	C								ANSI Class 150-300	
	Standard Bonnet				Extension Bonnet					
	ANSI Class 150-300	ANSI Class 600	ANSI Class 900-1500	ANSI Class 2500	ANSI Class 150-300	ANSI Class 600	ANSI Class 900-1500	ANSI Class 2500		
0.75	142	142	193	193	249	249	272	272	427	
1	142	142	193	193	249	249	272	272	427	
1.5	140	140	229	229	254	254	297	297	387	
2	140	140	229	272	254	254	297	312	387	
3	203	203			318	318			603	
4	206	239			320	320			606	
6	284	282			424	422			756	

Valve Size (mm)	D												ANSI Class 150-300	
	ANSI Class 150-600	ANSI Class 900-1500	ANSI Class 2500	ANSI Class 150		ANSI Class 300		ANSI Class 600		ANSI Class 900-1500		ANSI Class 2500		
	BW, SW & THD	BW, SW & THD	BW, SW & THD	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ	RF	RTJ	
0.75	105	108	159	92		99	105	105	105	137	137	154	154	
1	105	108	159	92		98	105	105	105	146	146	159	159	
1.5	125	118	165	111		118	124	126	125	167	167	179	181	
2	143	141	187	127		133	141	143	145	187	189	207	208	
3	168			149		159	167	168	170					
4	197			176		184	192	197	198					
6	254			226		236	245	254	256					

Weights

Body S/A (lbs)

Valve Size (inches)	ANSI Class 150 – 300		ANSI Class 600		ANSI Class 900 – 1500		ANSI Class 2500	
	FLG	BW, SW & THD	FLG	BW, SW & THD	FLG	BW, SW & THD	FLG	BW, SW & THD
0.75	36	27	38	27	57	44	70	44
1	36	27	38	27	75	44	90	44
1.5	49	36	53	36	100	57	118	57
2	57	44	64	44	144	82	255	154
3	127	73	128	99	—	—	—	—
4	196	121	216	135	—	—	—	—
6	355	238	450	272	—	—	—	—

Body S/A (kg)

Valve Size (mm)	ANSI Class 150 – 300		ANSI Class 600		ANSI Class 900 – 1500		ANSI Class 2500	
	FLG	BW, SW & THD	FLG	BW, SW & THD	FLG	BW, SW & THD	FLG	BW, SW & THD
20	16	12	17	12	26	20	32	20
25	16	12	17	12	34	20	41	20
40	22	16	24	16	45	26	53	26
50	26	20	29	20	65	37	116	70
80	58	33	58	45	—	—	—	—
100	89	55	98	61	—	—	—	—
150	161	108	204	123	—	—	—	—

Body/Actuator Volume (cu.ft)

Valve Size (inches)	ANSI Class 150 to 2500 and equivalent PN
.75	10.0
1	10.0
1.5	10.0
2	10.0
3	22.0
4	22.0
6	22.0

Body/Actuator Volume (dm³)

Valve Size (mm)	ANSI Class 150 to 2500 and equivalent PN
20	283
25	283
40	283
50	283
80	623
100	623
150	623

Bellows Seal Assembly

Valve Size		Estimated Additional Weight	
inches	mm	lbs	kg
.75 to 2	20 to 50	18	8
3 & 4	80 & 100	35	16
6	150	75	33

Options

Options

Extension Bonnets
Environmental Capabilities (LE Packing)
Lubricator & Isolation Valve
Other Flange Facings
Limit Stops
Body Drain Plug
Reducer and Nipple Connections
NACE Compliance
Custom Trim Materials
U.O.P. Trim Materials
Other Materials
Non-Destructive Examination
Oxygen Cleaning
Electric Actuators
High-temperature Service Construction (up to 1050 °F)

For additional Accessories and Options, consult Masoneilan.

Sales Office Locations

BELGIUM

Dresser Valves Europe
Boulevard du Souverain
207 B2 Vorstlaan,
B-1160 Brussels, Belgium
Phone: +32-2-344-0970
Fax: +32-2-344-1123

BRAZIL

Dresser Industria e Comercio Ltda
Divisao Masoneilan
Rua Funchal, 129 - Conj. 5A
04551-060 - Sao Paulo - SP Brazil
Phone: 55-11-2146-3600
Fax: 55-11-2146-3610

CANADA

Ontario
Dresser - Masoneilan
DI Canada, Inc.
835 Harrington Court, 2nd Floor
Burlington, Ontario L7N 3P3, Canada
Phone: 905-335-3529
Fax: 905-336-7628

CHINA

Dresser Flow Solutions
Beijing Rep. Office
Suite 1703, Capital Mansion
6 Xinyuan Rd. Chaoyang District
Beijing 100004, China
Phone: +86-10-8486-4515
Fax: +86-10-8486-5305

FRANCE

Masoneilan - Dresser Produits
Industriels
Energy 5
130/190 Boulevard de Verdun
92413 Courbevoie cedex, France
Phone: +33-1-4904-9000
Fax: +33-1-4904-9010

Dresser Produits Industriels S.A.S.,
Masoneilan Customer Service Centre
55 rue de la Mouche, Zone Industrielle
69540 Irigny, France
Phone: +33-4-72-39-06-29
Fax: +33-4-72-39-21-93

GERMANY

Dresser Valves Europe GmbH
Heiligenstrasse 75
Viersen D-41751, Germany
Phone: +49-2162-8170-0
Fax: +49-2162-8170-280

Dresser Valves Europe GmbH
Uhlandstrasse 58
60314 Frankfurt, Germany
Phone: +49-69-439350
Fax: +49-69-4970802

INDIA

Dresser Valve India Pvt. Ltd.
305/306, "Midas", Sahar Plaza
Mathuradas Vasanji Road
J.B. Nagar, Andheri East
Mumbai, 400059, India
Phone: +91-22-835-4790
Fax: +91-22-835-4791

Dresser Valve India Pvt. Ltd.
205, Mohta Building
4 Bhikaji Cama Place
New Delhi, 110 066, India
Phone: +91-11-2-616-4175
Fax: +91-11-5-165-9635

ITALY

Dresser Italia S.r.l.
Masoneilan Operations
Via Cassano, 77
80020 Casavatore, Napoli Italy
Phone: +39-081-7892-111
Fax: +39-081-7892-208

JAPAN

Niigata Masoneilan Co. Ltd. (NIMCO)
20th Floor, Marive East Tower
WBG 2-6 Nakase, Mihamaku,
Chiba-shi, Chiba 261-7120 Japan
Phone: +81-43-297-9222
Fax: +81-43-299-1115

KOREA

Dresser Korea Inc.
2109 Kuk Dong Building
60-1, ChoongMoo-ro 3-ka
Joong-gu, Seoul, Korea 100-705
Phone: +82-2-2274-0748
Fax: +82-2-2274-0720

KUWAIT

Dresser Flow Solutions
Middle East Operations
10th Floor, Al Rashed Complex
Fahad Salem Street, P.O. Box 242
Safat, 13003, Kuwait
Phone: +965-9061157
Fax: +965-3987879

MALAYSIA

Dresser Flow Solutions
Business Suite, 19A-9-1, Level 9
UOA Centre, No. 19, Jalan Pinang
50450 Kuala Lumpur, West Malaysia
Phone: +60-3-2161-0322
Fax: +60-3-2163-3612

MEXICO

Dresser Valve de Mexico, S.A. de C.V.
Henry Ford No. 114, Esq. Fulton
Fraccionamiento Industrial
San Nicolas
54030 Tlalnepantla Estado de Mexico
Phone: 52-5-310-9863
Fax: 52-5-310-5584

THE NETHERLANDS

Dresser Valves Europe
Steenhouwerstraat 11
3194 AG Hoogvliet, The Netherlands
Phone: +31-10-438-4122
Fax: +31-10-438-4443

RUSSIA

DS Controls
Nekhinskaya Street, 61
Veliky Novgorod
Russia, 173021
Phone: +7-8162-15-7898
Fax: +7-8162-15-7921

Dresser Moscow

Derbenevskaya ulitsa 1
Building 3, Office 17 115114
Moscow, Russia
Phone: +7 495-585-1276
Fax: +7 495-585-1279

SAUDI ARABIA

Dresser AL Rushaid
Valve & Instrument Co., Ltd.
(Darvico)
P.O. Box 10145
Jubail Industrial City 31961,
Saudi Arabia
Phone: +966-3-341-0278
Fax: +966-3-341-7624

SINGAPORE

Dresser Singapore Pte Ltd.
16 Tuas Avenue 8
Singapore 639231
Phone: +65-6-6861-6100
Fax: +65-6-6861-7172

SOUTH AFRICA

Dresser Limited
P.O. Box 2234
16 Edendale Road
Eastleigh, Edenvale 1610
Republic of South Africa
Phone: +27-11-452-1550
Fax: +27-11-452-6542

SOUTH & CENTRAL AMERICA AND THE CARIBBEAN

Dresser Masonelain
16240 Port Northwest Drive
Houston, TX 77041
Phone: 832-590-2303
Fax: 832-590-2529

SPAIN

Masoneilan S.A.
C/Murcia 39 C
08830 Sant Boi de Llobregat
Barcelona, Spain
Phone: +34-93-652-6430
Fax: +34-93-652-6444

UNITED ARAB EMIRATES

Dresser Flow Solutions
Middle East Operations
P.O. Box 61302
Roundabout 8
Units JA01 & JA02
Jebel Ali Free Zone
Dubai, U. A. E.
Phone: +971-4-8838-752
Fax: +971-4-8838-038

UNITED KINGDOM

DI U.K. Ltd.
East Gillibrands
Skelmersdale,
Lancashire WN8 9TU, England
Phone: +44-1695-52600
Fax: +44-1695-52601

UNITED STATES

Dresser - Masoneilan
85 Bodwell Street
Avon, MA 02322-1190
Phone: 508-586-4600
Fax: 508-427-8971

Dresser - Masoneilan
4841 Leopard Street
Corpus Christi, TX 78408-2621
Phone: 361-881-8182
Fax: 361-881-8246

Dresser - Masoneilan
Dresser Direct
1250 Hall Court
Deer Park, TX 77536
Phone: 281-884-1000
Fax: 281-884-1010

Dresser Flow Solutions
(Contractor Sales)
16240 Port Northwest Drive
Houston, TX 77041
Phone: 832-590-2303
Fax: 832-590-2529

Dresser - Masoneilan
12015 Mora Drive, Unit 2
Santa Fe Springs, CA 90670
Phone: 562-941-7610
Fax: 562-941-7810